



In 1966, SKB Arms Company exported their first Over & Under to America, which was marketed and distributed by Ithaca Arms Company. Since that time, American hunters have appreciated the hand crafted quality of of SKB Over & Under shotguns. Fielded now for over forty years, SKB's Over & Under models have become woven into the fabric of the American hunting community. SKB continues to lives up to their reputation as a premier line of shotguns, worthy of becoming family heirlooms, passed from generation to generation.

With over 150 years of precision gun making, SKB takes great pride in its reputation of hand crafted quality. The experienced hands that polish bores, mill receivers, checker stocks, and precisely fit metal to metal and wood to metal are the pillars of this fine craftsmanship.

This commitment to quality, reliability and value is ever present in the newest models from SKB. Our new Target model shotguns continue to evolve and improve, embracing higher standards of reliability, to meet the high expectations of our customers.

Our commitment to quality, reliability, and customer service are the attributes that distinguish SKB Shotguns from other shotgun manufactures. We are pleased to present the heirloom of the next generation - the GC7 Series shotgun.



SHOTGUNS

Inside Cover	GC7 12 Gauge
Page 1	Table of Contents
Page 2-3	GC7 Small Gauge Models
Page 4-5	GC7 Game Series
Page 6-7	GC7 Clay Series
Page 8-9	85TTR
Page 10-11	GC7 Trap Models
Page 12	Wood Grade Left Hand / Right Hand Sighting Plane
Page 13	Trigger Group Receiver Monobloc
Page 14-15	Gear
Page 16	Choke Tubes
Back Inside Cover	Charts

Exclusively Imported by

G. U. Inc. 4441 So 134th Street Omaha, NE 68137

Brochure Design By SAV ILLUSTRATIONS, Inc.

Creative Director
Scott Valasek
www.savillustrations.com

.

12 GAUGE MODELS



Grade II Left




Grade I Left




Grade II Right



Grade I Right







CAME SERIES

1

GC7 Game Series Grade III

GC7 Game Series Grade II

GC7 Game Series Grade I

The GC7 Game series shotguns provides hunters with a well balanced, fast shouldering field shotgun. The low profile GC7 receiver, back bored barrels (12 gauge only) and sculpted stock are the key and essential components of shooting comfort, quick and responsive handling. Choke selection is also a key element of a successful hunting experience. The Game series shotguns are fitted with the new flush fit Briley F2 series choke tube system. The F2 system provides a wider range of choke constrictions allowing hunters the ability to select a pellet pattern to match the hunting environment.

The new GC7 Game models are available in three grades in a choice of 12, 20, 28 or 410 gauge. Multi-gauge field sets are available in three configurations; 12 & 20, 20 & 28 or 28 & 410. The Game series is also offered in a reduced length of pull in either 12 or 20 gauge. Game model specification charts are shown on page 17.



LEFT HAND RIGHT HAND





85TTR High Grade Combo

85TTR Standard Grade Un-Single

The 85TTR is the next generation of performance tuned competition Trap guns from SKB, and are available in three base configurations, Over & Under, Unsingle or Combination. The 85TTR features 12 to 9mm tapered ribs on chrome lined barrels. The tapered rib provides an enhanced perspective allowing for faster target acquisition, while improving the shotguns' dynamic balance point for more

responsive handling. Specification charts are shown on page 18.

The 85TTR Unsingle barrel is equipped with an adjustable rib that allows you to change the point of impact to match your style of shooting. The rib can be adjusted without special tools. Simply loosen one slotted screw with the choke tube wrench, then rotate the small knurled wheel in the muzzle support block to move the point of impact either up or down. Then retighten the slotted screw.

From the factory, the Unsingle is set to shoot approximately 65/35 or approximately 4" above the point of aim. The point of impact can be adjusted from 50/50 to 90/10 by simply rotating the wheel to change the angle of the rib.

The 85TTR barrel group has been fitted with a nickel center post and the HI-VIZ Comp Sight system. This sight allows the shooter to select the size and color Litepipe to meet the individual's ocular variation and lighting conditions of the event. The Litepipe is an optical-quality plastic, injection molded to precise dimension and color. A specific Litepipe kit has been selected to match the barrel configuration of each 85TTR model.

Litepipe selection for O/U and Unsingle shown below. Litepipe selection for Combo's include 4-Red, 4-Green, and 1-White.





The CTS Adjustable Comb System allows

for both height and offset adjustments. The base plates are etched with 1/16"

indicating lines for precise left or right alignment of the comb. Comb height is adjusted by sliding 1/16" nylon washers

The 85TTR tournament stock is available in either Monte Carlo or Trap standard

version, and available in either cast off

or cast on configuration. The forward

wrist with the stock enhancing the shooters

ability to swing and control the shotgun. The new Pachmayr XLT pad reduces both

felt recoil and shooter fatigue.

over the support posts.



GC7 Top Single Grade I

GC7 Top Single Grade I

The new GC7 Top Single is a specialized Trap shotgun for singles and handicap events from pad to muzzle. The GC7 is constructed from performance based components and design features that will require the serious target shooter to give SKB due consideration. The Top Single features a tapered top ventilated rib, back-bored barrel with lengthened forcing cone, three Briley X2 extended chokes and a Graco adjustable comb stock fitted with a Pachmayr super soft XLT pad.



The 32" model Top Single is fitted with a 13.5" length of pull stock with adjustable comb and is available in either Monte Carlo or Trap Standard.

The 34" model Top Single is fitted with a 14 5/8" length of pull stock with adjustable comb and is available in either Monte Carlo or Trap Standard.

Limited production quantities of the GC7 Grade II and III will be available in two base configurations, Unsingle or Unsingle & Over/Under combination. These models will features 12 to 9mm tapered ribs on all barrels, Briley X2 extended choke tubes specification charts are shown on page 18.



GC7 Trap Combo Grade III

. Point Of Impact 50/50 to 90/10

Graco 350 hardware, standard on all Grade I Clays and Trap adjustable comb models.



GC7 Grade II fitted with Grade III / IV – Deluxe

GC7 Grade III fitted with Grade V / VI - Fancy

Hand selected grades of American Black Walnut stocks and forends are tastefully detailed with 18 line diamond cut checkering ensuring a positive grip and beautifully finished with high gloss polyurethane.



A stocks' cast is a subtle turning of the stock, directing the recoil away from the shooters face and aligning the pad into the shoulder pocket. Cast of a stock is the distance measured right or left from the center line of the rib extending back over the stock. A right hand or cast off stock measures 0-3mm at the heel of the pad and 3-6mm at the toe of the pad to the right of the center line. A left hand or cast on stock measures 0-3mm at the heel of the pad and 3-6mm at the toe of the pad to the left of the center line.

The stock's length of pull (LOP) gives consideration to the general size of the shooter, and the forward or rearward placement of the shooter's cheek on the comb of the stock.


The drop at comb (DAC) and heel (DAH) is the distance measured from an imaginary horizontal line extending back from the sighting plane of the shotgun. When the shooter's cheek is resting on the comb, these dimensions affect the alignment of the shooter's eye either above or below the horizontal line of the sighting plane.

The thickness of the comb and the cast of the stock's comb determine the left or right positioning of the shooter's eye relative to the centerline of the sighting plane. The "Cast at the Toe" shifts the butt pad position to conform with the muscular structure of the chest and shoulder. The radius of the pistol grip and the length of the trigger pull (LOTP) determines the positioning of the shooter's hand, affecting both control and comfort.

DAC LOP LOTP

STOCK STYLE			DROP AT COMB DAC	AT COMB Radius		DROP AT HEEL DAH	PACHMAYR PAD TYPE	PAD SIZE
Game	Fixed	14 5/8"	1 1/2"	4.0"	N/A	2 3/16"	Old English	0.6"
Game - Youth	Fixed	13 1/2"	1 1/2"	4.0"	N/A	2 1/8"	Old English	0.6"
Clays	Fixed	14 5/8"	1 1/2"	4.0"	N/A	2 3/16"	Decelerator	0.8"
Clays	Adjustable	14 5/8"	1 5/8"	4.0"	N/A	2 3/8"	Decelerator	0.8"
Trap MC	Adjustable	14 5/8"	1 11/16"	3 1/2"	1 11/16"	2"	XLT	1.0"
Trap Std	Adjustable	14 5/8"	1 11/16"	3 1/2"	N/A	2"	XLT	1.0"
MC Youth	Adjustable	13 1/2"	1 11/16"	3 1/2"	1 11/16"	2"	XLT	1.0"
Std Youth	Adjustable	13 1/2"	1 11/16"	3 1/2"	N/A	2"	XLT	1.0"


Note: Small gauge Game models are fitted with a plastic butt plate

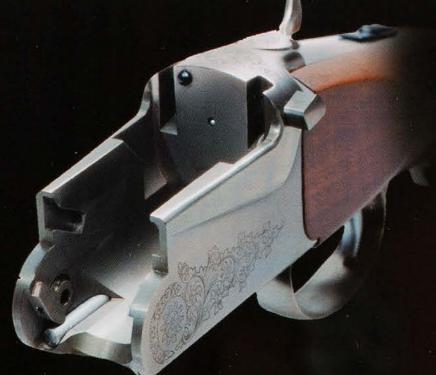

The SKB **receiver** is produced in two sizes; a standard frame for 12 gauge models, and a smaller frame for all 20, 28, and 410 gauge models. The receiver is cut from a forged steel ingot by computerized CNC machines to precise dimensions measured in thousandths of an inch. The final result is a low profile box lock receiver utilizing a modified "Greener" style crossbolt locking mechanism inletted at the top of the receiver. The strength of this design ensures that your SKB is capable of providing a lifetime of shooting enjoyment. The receiver is hand polished and enhanced with a rolled engraving pattern. It is then protected by a silver nitride finish applied in super heated conditions that provides a corrosion resistant surface.

The **monobloc** is also cut from a forged steel ingot by computerized CNC machines to similar precise dimensions. The monobloc contains 2 locking lugs which engage the crossbolt, 2 integral shoulder lugs and a base lug which interlocks with the receiver as the action is closed. This combination forms one of the strongest actions on the market. The barrel tubes are seated and soldered into the monobloc to ensure the correct point of impact of both the top and bottom barrel.

Each side of the monobloc is precisely cut for a single piece ejector and the pivot seat. The finished barrel group rotates at the pivot seat on two trunnions mounted through the sides of the receiver. After years of use, the SKB action can be easily re-tightened if need be, ensuring that your shotgun maintains a tight fit for many more years of service.

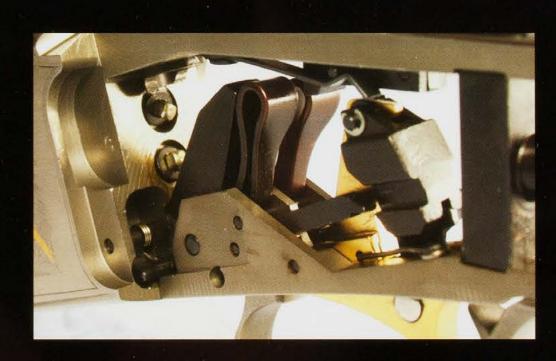

High strength chromium alloy steel barrels are produced using a hammer forging process. This process ensures consistent wall diameter and trueness over the entire length of the barrel. The polishing through a series of vertically mounted honing rods. The barrels are mounted in a fixture which lifts and lowers them vertically 16 feet while the spinning honing rods polish the barrels to a mirror finish of consistent diameter. This process reduces pellet deformation and produces more uniform pellet patterns.


The **trigger** system has undergone several improvements to reduce engagement creep, pull weight, sear let off, and over-travel. These refinements all contribute to producing a smooth crisp tournament

Performance, reliability, and longevity have also been significantly improved with new spring designs. Normal cocking and firing sequences in a shotgun cause cyclic fatigue and stress in springs. Engineers utilizing new computer aided three dimensional analysis of spring shape, material alloys, micro-hardness, and spring energy were able to significantly reduce the affects of cyclic fatigue in the hammer springs, sear springs, and cocking shoe springs.

The resulting design changes in these springs have doubled the life expectancy and reliability of the tournament trigger system.



OPTIONAL PIGEON PORTING

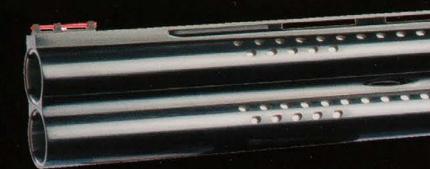

The SKB barrel group (12ga) is available with "Pigeon Porting" by Mag-Na-Port International. This porting process is accomplished by Electrical Discharge Machining (EDM), ensuring smooth incisions of exact dimensions. The "Pigeon Porting pattern" reduces perceived recoil by 15 to 20%, and muzzle lift by 60 to 80% in 12 gauge models.



Mesh Hull Bag (MHB-0)



Mesh Hull Bag with Shell Box Holder (MHB-1)

Mesh Hull Bag with Two Shell Box Holders (MHB-2)

Our Mesh Hull Bags are fitted with two heavy duty belt clips. The snap spring top closure and zipper bottom allows for easy loading and unloading.



Divided Shell Pouch with Belt

(RLB-D)

The Shell Box Holder and Reloaders Bags are fitted with two heavy duty belt clips. The Reloaders Bags also have a 2" web belt and zipper bottoms for easy unloading. The Choke Tube Zipper Case

(RLB-1)

Reloaders Bag



Choke Tube Case (CTZC)



Range Bag (12 x 7 x 11) (RB-M)



The case has two belt loops sized

to fit a 2" web belt and a D ring snap.

Range Bag $(12 \times 7 \times 8)$ (RB-S)

The Range Bags main compartment holds shell boxes and other large shooting accessories. The bag is fitted with 4 outer pockets for additional accessories and a water bottle holder. The bag has a detachable shoulder strap and a padded carrying handle.





Reloaders Bag with Two Shell Box Holders (RLB-2)

SKB.



Protective **Counter Pad** (12" x 48") (PAD)



Lithium Gun Grease (LGG-10cc)



Shotgun Case 49" fits up to 30" barrel (GC-49) Shotgun Case 51" fits up to 32" barrel (GC-51) Shotgun Case 53" fits up to 34" barrel (GC-53)



SKB "Exploding Target" Hat

The rolled crown, 6-panel hat is a cotton twill, washed polo with a velcro adjustable strap.

SKB GC7 Logo Hat

Rolled crown, 6-panel hat, washed cotton twill, wafer bill, 3-D SKB logo embroidered, with a velcro adjustable strap.



150th Anniversary Hat

Rolled crown, 6-panel hat, washed cotton twill, wafer bill, 3-D SKB logo embroidered, with a velcro adjustable strap.







THEFIEL THERMSTORY WALL

Magnetic Rib Site is available in three sizes and includes 4 interchangeable Litepipes.

Comp Site Kit replaces any SKB front site, includes base, mounting screws, carrying case, key and 8 Litepipes.

Spark Sight fits all SKB Field Models. Available in Red or Green (6/48 thread)

For a complete listing of specific models each site fits, visit our web site at www.skbshotguns.com



Our Gun Case is constructed from heavy duty 600 Denier nylon and is backed with high density foam padding. The interior is lined with a soft velveteen cloth to protect your shotgun. A large full length zipper and large padded muzzle cap allows for easy access. The case also features two accessory pockets, adjustable shoulder strap and padded handles.



SHELL BOX CARRIER

RETAIL PRICE \$14.95

SKB

CALL FOR SHIPPING AND HANDLING

Photocopies of coupon are excepted.

REINFORCED

BACK PLATE

FITTED WITH

2 HEAVY DUTY

METAL CLIPS

FOR SECURE

ATTACHMENT

TO YOUR

BELT

\$7.50 each

\$6.50 each

\$5.50 each

● 1200 DENIER

NYLON

• 2 ELASTIC

LOOPS

• FITS

RE-SHOOT

STANDARD

BOX OF 25 -

2 3/4 GA. SHELLS

Buy three - ten

Buy one - Special Price

Buy eleven - or more

Shooting Vest

The SKB Deluxe Nylon Mesh shooting vest features full length quilted shoulder pad with an interior pocket for additional padding. Adjustable waist straps insure a comfortable fit. Other shooting vest

features include rear hull pocket with zipper, pocketed reshoot loops and front bellow pockets. Available in sizes: L, XL, 2XL, 3XL

T-SHIRT'S

ALL T-SHIRT'S COME WITH LARGE BACK PRINT AND A SMALL LEFT CHEST PRINT

LARGE BACK PRINT SHOWN BELOW ON GRAY T-SHIRT'S

LEFT FRONT CHEST PRINT SHOWN BELOW ON BLACKT-SHIRT'S



SKB Logo T-Shirt

100% cotton. Available in Black, White, or Gray Size: M, L, XL, 2XL, 3XL



150th Anniversary T-Shirt

100% cotton. Available in Black, White, or Gray. Size: M, L, XL, 2XL, 3XL



85TSS Logo T-Shirt

100% cotton. Available in Black, White, or Gray. Size: M, L, XL, 2XL, 3XL



SPARTA GC7 T-Shirt

100% cotton. Available in Black. Size: M, L, XL, 2XL, 3XL





SPARTA GC7 TRAP T-Shirt

100% cotton. Available in Stone Wash Gray. Size: M, L, XL, 2XL, 3XL



Shooting Glasses Blinders (BLINDER)



28 oz. Sports Bottle







12 Gauge Competition

Nomenclature		Constriction	Extended	Internal	Rim Notch Code
Trap Full **	TF	0.035	X2CS12TF	F2CS12TF	None
Full **	F	0.030	X2CS12F	F2CS12F	1
Imp. Modified **	IM	0.025	X2CS12IM	F2CS12IM	2
Modified	M	0.020	X2CS12M	F2CS12M	3
Light Modified	LM	0.015	X2CS12LM	F2CS12LM	4
Imp. Cylinder	IC	0.010	X2CS12IC	F2CS12IC	5
Skeet	SK	0.005	X2CS12SK	F2CS12SK	6
Cylinder	CYL	0.000	X2CS12CYL	F2CS12CYL	7





12 Gauge Standard

Nomenclature		Constriction	Extended	Internal	Rim Notch Code		
Extra Full **	XF	0.035	X2S12XF	F2S12XF	None		
Full **	F	0.030	X2S12F	F2S12F	1		
Imp. Modified **	IM	0.025	X2S12IM	F2S12IM	2		
Modified	M	0.020	X2S12M	F2S12M	3		
Light Modified	LM	0.015	X2S12LM	F2S12LM	4		
Imp. Cylinder	IC	0.010	X2S12IC	F2S12IC	5		
Skeet	SK	0.005	X2S12SK	F2S12SK	6		
Cylinder	CYL	0.000	X2S12CYL	F2S12CYL	7		





20 Gauge Standard

Nomenclature		Constriction	Extended	Internal	Rim Notch Code
Extra Full **	XF	0.028	X2S20XF	F2S20XF	None
Full **	F	0.024	X2S20F	F2S20F	1
Imp. Modified	IM	0.020	X2S20IM	F2S20IM	2
Modified	M	0.016	X2S20M	F2S20M	3
Light Modified	LM	0.012	X2S20LM	F2S20LM	4
Imp. Cylinder	IC	0.008	X2S20IC	F2S20IC	5
Skeet	SK	0.004	X2S20SK	F2S20SK	6
Cylinder	CYL	0.000	X2S20CYL	F2S20CYL	7

Constriction Extended

0.024

0.020

0.016

0.012

0.008

0.004

0.000

X2S28XF

X2S28F

X2S28IM

X2S28M

X2S28IC

X2S28SK

X2S28CYL

Rim Notch Code

None

3

4

5

Internal

F2S28XF

F2S28F

F2S28IM

F2S28M F2S28IC

F2S28SK

F2S28CYL





410 Gauge Standard

28 Gauge Standard

Nomenclature

Extra Full **

Imp. Modified

Imp. Cylinder

Full **

Skeet

Cylinder

Nomenclature	Nomenclature		Extended	Internal	Rim Notch Code		
Extra Full **	XF	0.024	X2S410XF	F2S410XF	None		
Full **	F	0.020	X2S410F	F2S410F	1		
Imp. Modified	IM	0.016	X2S410IM	F2S410IM	2		
Modified	M	0.012	X2S410M	F2S410M	3		
Imp. Cylinder	IC	0.008	X2S410IC	F2S410IC	4		
Skeet	SK	0.004	X2S410SK	F2S410SK	5		
Cylinder	CYL	0.000	X2S410CYL	F2S410CYL	6		

^{**} Not recommened for use with steel shot.

GC7	STANDARD FEATURES	Grade I	Grade II	Grade II
THE RESERVE OF THE PERSON NAMED IN COLUMN	The state of the s			
RECEIVER 7 SERIES	Nitride Finish with Scroll Engraving			
THE RESIDENCE OF THE PARTY OF T	Nitride Finish with Game Scene Engraving		•	
	Nitride Finish, Gold Enhanced Game Scene Engraving			
ADDITIONAL ENGRAVING	Pivots, Receiver Bridge		•	
	Top Lever, Forend Iron & Lever			
SAFETY	Manual			
TRIGGER	Chrome, Single Selective			
The second second second	Gold Enhanced, Single Selective			
	12 & 20 Interia, 28 & 410 Mechanical Assisted			
BARREL	Hammer Forged Chrome-Moly Alloy	•		
CHAMBER	3", (28ga - 2 3/4") with lengthened Forcing Cones			
EJECTOR	Automatic, Selective			
STOCK	American Black Walnut Grade II / III			
TO THE DESIGNATION OF THE PARTY.	American Black Walnut Grade III / IV			The same of
	American Black Walnut Grade V / VI			
CHECKERING	18 Line per inch, Diamond Cut		•	
FINISH	High Gloss Polyurethane			
			The state of	Day Wa
GC7 GAME MODELS	UNIQUE FEATURES	Grade I	Grade II	Grade I
VENTU ATED TOD DIR	12gg Matta Surfage 9.5 mm		Carrier S	OF A SECTION
VENTILATED TOP RIB	12ga - Matte Surface - 9.5 mm	•		
	12ga - Center Channel - 9.5 mm	The state of the state of		•
	20, 28 & 410ga - Matte Surface - 8.5 mm	•		
	20, 28 & 410ga - Center Channel - 8.5 mm			
SIGHTS	Metal Front Bead	•	•	
SIDE RIBS	Solid			
STOCK	Plastic Grip Cap	•		
BUTT PAD	12ga & Youth - Pachmayr Old English - Black, size 0.6"			
BUTT PLATE	20, 28, 410ga - Plastic Plate			
CHOKE SYSTEM	28" Barrels - Internal Briley F2 - Full, Mod, Imp Cyl.			
	26" Barrels - Internal Briley F2 - Mod, Imp Cyl., Skeet	•		•
GC7 CLAYS MODELS	UNIQUE FEATURES	Grade I	Grade II	Grade I
GOT CEATS MODELS	ONIQUE FEATORES	Grader	Grade II	Grade
VENTILATED TOP RIB	12ga - Center Channel - 9.5 mm			J- WAXA
	12ga - Matte Surface, Tapered 9.5 to 7.0 mm		•	
The state of the s	20, 28 & 410ga - Center Channel - 8.5 mm	to Final X 8		
SIGHTS	Nickel Center Post with White Front Bead			
SIDE RIBS	Solid	W WATER	S. SALL PUAL	Bing I'm
	Ventilated	7 415	E 0 9 1	
STOCK	Optional Adjustable Comb			
BUTT PAD	Pachmayr Decelerator - Black, size 0.8"			
CHOKE SYSTEM	Extended Briley X2 - Mod, Imp Cyl., Skeet		•	
GC7 TRAP MODELS	UNIQUE FEATURES	Grade I	Grade II	Grade
FIXED VENTILATED TOP RIB	Top Single - Stepped, Matte Surface, Taper 9.5 to 7.0 mm	The second second	1.7/4.20	
	O/U (Combo) - Stepped Center Channel, Tapered 12 to 9.5 mm			
ADJUSTABLE TOP RIB	Un-Single - Stepped, Center Channel, Tapered 12 to 9.5 mm			
SIGHTS	Nickel Center Post with White Front Bead			
SIDE RIBS	O/U (Combo) Ventilated	WHI WELL		
STOCK	Optional Adjustable Comb			
BUTT PAD	Pachmayr XLT - Black, size 1.0"			
CHOKE SYSTEM	Top Single - Extended Briley X2 - Trap Full, Full, Imp Mod	-		J. British
OHORE STOTEM.	Un-Single - Extended Briley X2 - Trap Full, Full, Imp Mod	The state of the s		
				DV SERVER
	Combo - Extended Briley X2 - Trap Full, Full, 2-Imp Mod			



XF

F

IM

M

IC

SK

CYL

Game			Grad	le I	Grad	e II	Grade	Grade III			
	Gauge	BBL Length	Manufacture ID	Avg. Weight*	Manufacture ID	Avg. Weight*	Manufacture ID	Avg. Weight*			
Over & Under	12	28"	GA7828CF	8 lb. 1 oz.	GB7828CF	8 lb. 3 oz.	GC7828CF	8 lb. 4 oz.			
	12	28"	GA7828CF-LH	8 lb. 1 oz.	GB7828CF-LH	8 lb. 3 oz.	GC7828CF-LH	8 lb. 4 oz.			
Million control	12	26"	GA7826CF	7 lb. 13 oz.	GB7826CF	8 lb. 1 oz.	GC7826CF	8 lb. 3 oz.			
	20	28"	GA7808CF	6 lb. 15 oz.	GB7808CF	7 lb. 1 oz.	GC7808CF	7 lb. 4 oz.			
	20	26"	GA7806CF	6 lb. 11 oz.	GB7806CF	6 lb. 13 oz.	GC7806CF	7 lb. 0 oz.			
	28	28"	GA7888CF	7 lb. 3 oz.	GB7888CF	7 lb. 4 oz.	GC7888CF	7 lb. 4 oz.			
	28	26"	GA7886CF	7 lb. 2 oz.	GB7886CF	7 lb. 3 oz.	GC7886CF	7 lb. 3 oz.			
	410	28"	GA7848CF	7 lb. 4 oz.	GB7848CF	7 lb. 4 oz.	GC7848CF	7 lb. 4 oz.			
× × 3	410	26"	GA7846CF	7 lb. 3 oz.	GB7846CF	7 lb. 3 oz.	GC7846CF	7 lb. 3oz.			
Youth Models	12	28"	GA7828CFY	8 lb. 0 oz.	GB7828CFY	8 lb. 2 oz.	GC7828CFY	8 lb. 2 oz.			
	12	26"	GA7826CFY	7 lb. 13 oz.	GB7826CFY	8 lb. 0 oz.	GC7826CFY	8 lb. 0 oz.			
	20	26"	GA7806CFY	6 lb. 8 oz.	GB7806CFY	6 lb. 10 oz.	GC7806CFY	6 lb. 10 oz.			
Field Sets	12 & 20	28"	GA7828/7808CF	8 lb. 1 oz.	GB7828/7808CF	8 lb. 3 oz.	GC7828/7808CF	8 lb. 2 oz.			
	20 & 28	28"	GA7808/7888CF	7 lb. 0 oz.	GB7808/7888CF	7 lb. 1 oz.	GC7808/7888CF	7 lb. 3 oz.			
And the second	28 & 410	28"	GA7888/7848CF	7 lb. 3 oz.	GB7888/7848CF	7 lb. 4 oz.	GC7888/7848CF	7 lb. 4 oz.			

*Weights will very due to wood density.

lay			Grad	le I	Grad	e II	Grade	: III
	Gauge	BBL Length	Manufacture ID	Avg. Weight*	Manufacture ID	Avg. Weight*	Manufacture ID	Avg. Weight*
Fixed Comb	12	32"	CA7822FCV	8 lb. 10 oz.	CB7822FCV	8 lb. 11 oz.	CC7822FCV	8 lb. 12 oz.
	12	30"	CA7820FCV	8 lb. 9 oz.	CB7820FCV	8 lb. 9 oz.	CC7820FCV	8 lb. 9 oz.
	12	30"	CA7820FCV-LH	8 lb. 9 oz.	CB7820FCV-LH	8 lb. 9 oz.	CC7820FCV-LH	8 lb. 9 oz.
	12	28"	THE RESIDEN		CB7828FCV	8 lb. 6 oz.		
	20	30"	CA7800FCV	7 lb. 8 oz.	CB7800FCV	7 lb. 8 oz.	CC7800FCV	7 lb. 9 oz.
	20	28"	MANAGEMENT AND	1100 7 1 1 1 1 1 1 1	CB7808FCV	7 lb. 8 oz.		Physical Res
	28	30"	CA7880FCV	7 lb. 8 oz.	CB7880FCV	7 lb. 8 oz.	CC7880FCV	7 lb. 8 oz.
	28	28"			CB7888FCV	7 lb. 7 oz.		
	410	30"	Wally Committee of the		CB7840FCV	7 lb. 10 oz.	CC7840FCV	7 lb. 10 oz.
	410	28"			CB7848FCV	7 lb. 9 oz.		
Adjustable	12	32"	CA7822ACV	8 lb. 10 oz.	CB7822ACV	8 lb. 11 oz.	CC7822ACV	8 lb. 12 oz.
Comb	12	30"	CA7820ACV	8 lb. 9 oz.	CB7820ACV	8 lb. 9 oz.	CC7820ACV	8 lb. 9 oz.
	12	30"	CA7820ACV-LH	8 lb. 9 oz.	CB7820ACV-LH	8 lb. 9 oz.	CC7820ACV-LH	8 lb. 9 oz.
	12	28"	LACTURE VIOLET		CB7828ACV	8 lb. 6 oz.	OUT OF CONTROL ENT	0 15. 5 02.
	20	30"	CA7800ACV	7 lb. 8 oz.	CB7800ACV	7 lb. 10 oz.	CC7800ACV	7 lb. 10 oz.
	20	28"	With the state of the said	Cargody (wijeroniwa)	CB7808ACV	7 lb. 8 oz.		7 10: 10 02.
	28	30"	CA7880ACV	7 lb. 8 oz.	CB7880ACV	7 lb. 8 oz.	CC7880ACV	7 lb. 8 oz.
	28	28"	T, # 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1		CB7888ACV	7 lb. 7 oz.		
	410	30"		T	CB7840ACV	7 lb. 10 oz.	CC7840ACV	7 lb. 10 oz.
	410	28"	*(T) (T) (T)		CB7848ACV	7 lb 9 oz.		
Fixed Comb	12 & 20	30"			CB7820/00FCV	8 lb. 9 oz.	CC7820/00FCV	1 0 15 0 00
Sets	20 & 28	30"		The Mary Control	CB7800/80FCV	7 lb. 8 oz.	CC7820/80FCV	8 lb. 9 oz. 7 lb. 9 oz.
	28 & 410	30"			CB7880/40FCV	7 lb. 8 oz.	CC7880/40FCV	7 lb. 8 oz.
	20, 28, 410	30"			CB78084FCV/30	7 lb. 10 oz.	CC78084FCV/30	7 lb. 10 oz.
	20, 28, 410	28"		ELYALE I	CB78084FCV/28	7 lb. 9 oz.	CC78084FCV/28	7 lb. 10 02.
Adjustable	40.0.00	000		V Table Table				
Comb Sets	12 & 20	30"			CB7820/00ACV	8 lb. 9 oz.	CC7820/00ACV	8 lb. 9 oz.
	20 & 28	30"	7 T. W. C. W. M. T. D. W. S. W.		CB7800/80ACV	7 lb. 8 oz.	CC7800/80ACV	7 lb. 8 oz.
	28 & 410	30"	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		CB7880/40ACV	7 lb. 8 oz.	CC7880/40ACV	7lb. 8 oz.
	20, 28, 410	30" 28"	0 1 201 (1) 491 111	7877 77 77 87	CB78084ACV/30 CB78084ACV/28	7 lb. 10 oz. 7 lb. 10 oz.	CC78084ACV/30	7 lb. 10 oz.

*Weights will very due to wood density.

GC/							_			,		, ,	
	Gauge	BBL Length	Grade I MFG. ID #	Avg Weight		HG Avg Weight*	Tabologia,	a (will)		M _{O.} ;	Stan Camb	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	(eg Ha)
Γορ Şingle	12	32"	CA7822AMTS-RL	8 lb. 8 oz.		T. Signi	9→7					•	$\widetilde{}$
op omg.	12	32"	CA7822AMTS-RL-LH	8 lb. 8 oz.			9→7						
	12	32"	CA7822ANTS-RL	8 lb. 6 oz.			9→7						
	12	32"	CA7822ANTS-RL-LH	8 lb. 6 oz.			9→7		Ť			•	
	12	34"	CA7824AMTS	9 lb. 1 oz.			9→7						H
	12	34"	CA7824AMTS-LH	9 lb. 1 oz.			9→7		Ť				
	12	34"	CA7824ANTS	8 lb. 14 oz.			9→7		•				
	12	34"	CA7824ANTS-LH	8 lb. 14 oz.			9→7		•	-	•		
			Grade II MFG. ID #	NED W	Grade III MFG. ID #								
Jn-Single	12	32"	CB78TR22FTMUA	8 lb. 14 oz.			12→9	•		•		-	
	12	34"	CB78TR24FTMUA	8 lb. 14 oz.			12→9	•				× _w ==	
	12	32"	CB78TR22ATMUA	8 lb. 13 oz.	CC78TR22ATMUA	9 lb. 0 oz.	12→9		•	•			
	12	32"	CB78TR22ATNUA	8 lb. 13 oz.	CC78TR22ATNUA	8 lb. 15 oz.	12→9		•		•	Like X to	
	12	34"	CB78TR24ATMUA	8 lb. 15 oz.	CC78TR24ATMUA	9 lb. 2 oz.	12→9		•				
	12,	34"	CB78TR24ATMUA-LH	9 lb. 0 oz.	CC78TR24ATMUA-LH	9 lb. 3 oz.	12→9	27.0	•	•			•
	12	34"	CB78TR24ATNUA	8 lb. 14 oz.	CC78TR24ATNUA	8 lb. 15 oz.	12→9	2	•		•	Walnut.	
	12	34"	CB78TR24ATNUA-LH	9 lb. 0 oz.	CC78TR24ATNUA-LH	9 lb. 3 oz.	12→9		•			and the st	•
Combo	12	30"/32"	CB78TR20ATM/22	8 lb. 11 oz.	CC78TR20ATM/22	8 lb. 14 oz.	12→9						
	N-	30"/32"	CB78TR20ATN/22	8 lb. 9 oz.	CC78TR20ATN/22	8 lb. 13 oz.	12→9	•		•		1700	
	12	30"/34"	CB78TR20ATM/24	8 lb. 10 oz.	CC78TR20ATM/24	8 lb. 14 oz.	12→9		•	•			
	12	30"/34"	CB78TR20ATN/24	8 lb. 10 oz.	CC78TR20ATN/24	8 lb. 14 oz.	12→9		•		•		
	12	32"/34"	CB78TR22ATM/24	8 lb. 11 oz.	CC78TR22ATM/24	8 lb. 15 oz.	12→9		•	•	W. C.	KILL POLI	
	12	32"/34"	CB78TR22ATM/24-LH	8 lb. 12 oz.	CC78TR22ATM/24-LH	9 lb. 0 oz.	12→9		•	•			
	12	32"/34"	CB78TR22ATN/24	8 lb. 12 oz.	CC78TR22ATN/24	9 lb. 0 oz.	12→9		•		•		
	12	32"/34"	CB78TR22ATN/24-LH	8 lb. 12 oz.	CC78TR22ATN/24-LH	9 lb. 0 oz.	12→9		•	TE V	•	MAC T	

*Weights will very due to wood density.

85TTR

	Gauge	BBL Length	Standard Grade MFG. ID #	Avg Weight*	High Grade Wood MFG. ID #	HG Avg Weight*	/apored p.	61. (mm) 10 Fixed	/ J.	Mon's lable	Star Carlo	Pare 20, 20, 20, 20, 20, 20, 20, 20, 20, 20,	/607
Under and Over	12	30"	85TR20FCTM	8 lb. 10 oz.			12→9	•	1-1	•	-0.0	915010	
	12	30"	85TR20FCTN	8 lb. 8 oz.			12→9	•			•	- S. S. S. S.	
	12	32'	85TR22FCTM	8 lb. 14 oz.			12→9	•	Park	•		11000	
	12	. 32"	85TR22FCTN	8 lb. 11 oz.			12→9	•			•		
	12	30"	85TR20ACTM	8 lb. 13 oz.	85TR20ACTM*	9 lb. 0 oz.	12→9		•	•		9x-1 II	
	12	30"	85TR20ACTN	8 lb. 10 oz.	85TR20ACTN*	8 lb. 13 oz.	12→9		•		•		
	12	32"	85TR22ACTM	8 lb. 13 oz.	85TR22ACTM*	9 lb. 0 oz.	12→9		•	•			
	12	32"	85TR22ACTN	8 lb. 14 oz.	85TR22ACTN*	9 lb. 1 oz.	12→9	1.0	•		•	(Note to	
Un-Single	12	32"	85TR22FCTMUA	8 lb. 14 oz.	85TR22FTMUA*	8 lb. 15 oz.	12→9						
	12	34"	85TR24FCTMUA	NO THE PARTY OF TH	85TR24FTMUA*	9 lb. 0 oz.	12→9	•	X-10	•	1000		
	12	32"	85TR22ACTMUA	7700 377	85TR22ATMUA*	9 lb. 2 oz.	12→9		•	•			
	12	32"	85TR22ACTNUA		85TR22ATNUA*	8 lb. 15 oz.	12→9		•		•		
	12	34"	85TR24ACTMUA	8 lb. 15 oz.	85TR24ATMUA*	9 lb. 2 oz.	12→9		•	•			
	12	34"	85TR24ACTMUA-LH	9 lb. 0 oz.	85TR24ATMUA*-LH	9 lb. 2 oz.	12→9	V 12	•	•			•
	12	34"	85TR24ACTNUA	8 lb. 14 oz.	85TR24ATNUA*	9 lb. 3 oz.	12→9	Win	•		•	Way I	
	12	34"	85TR24ACTNUA-LH	9 lb. 0 oz.	85TR24ATNUA*-LH	9 lb. 0 oz.	12→9						•
Combo	12	30"/32"	85TR20ATM/22	8 lb. 11 oz.	85TR20ATM/22*	8 lb. 14 oz.	12→9	Town I				NO.	
	12	30"/32"	85TR20ATN/22	8 lb. 9 oz.	85TR20ATN/22*	8 lb. 15 oz.	12→9		•		•	Market N	
	12	30"/34"	85TR20ATM/24	8 lb. 10 oz.	85TR20ATM/24*	8 lb. 15 oz.	12→9	B. W.	•	•			
	12	30"/34"	85TR20ATN/24	8 lb. 10 oz.	85TR20ATN/24*	8 lb. 15 oz.	12→9	100	•		•	1000	
	12	32"/34"	85TR22ATM/24	8 lb. 11 oz.	85TR22ATM/24*	9 lb. 2 oz.	12→9	- × 0	•	•			
	12	32"/34"	85TR22ATM/24-LH	8 lb. 12 oz.	85TR22ATM/24*-LH	9 lb. 2 oz.	12→9	*	•	•		5- 20km	•
	12	32"/34"	85TR22ATN/24	8 lb. 12 oz.	85TR22ATN/24*	9 lb. 1 oz.	12→9		•		•		
	12	32"/34"	85TR22ATN/24-LH	8 lb. 12 oz.	85TR22ATN/24*-LH	9 lb. 1 oz.	12→9		•		•	- OHE	•
	12	30"/32"	85TR20ATM/22-RL	8 lb. 9 oz.			12→9	3.00	•	•		•	
	12	30"/32"	85TR20ATN/22-RL	8 lb. 9 oz.			12→9		•	3-4	•	•	

*Weights will very due to wood density.

