

OF QUALITY

# 85TSS

# The Winning Combination For Competitive Shooters



Not only is the 85TSS series the most comprehensive line of target over & unders, SKB has also "raised the bar" on "out of the box" performance features. You will discover that the new 85TSS series is simply the most technically advanced target model ever produced by SKB.

manufacturer today.

The 85TSS features a low profile box lock action fitted with a "competition barrel group", a "tournament stock and forend", and a "refined trigger group". These components are the fundamental elements which give the 85TSS its responsive handling, well balanced fit, fast sighting plane, crisp trigger, soft feel, and hard hitting attributes.

The development and design of the 85TSS series is in part, attributable to the comments and ideas received from a network of competitive shooters and customers throughout the United States and other countries. Their suggestions provided the basis for design changes, technical refinements, and the inclusion of the specialized equipment developed by leading aftermarket manufacturers. Special recognition goes to those industry professionals who provided technical assistance in the development of the new 85TSS series; Fred Wenig of Wenig Custom Gun Stocks, Mike Jordan former Winchester Pro-Staff shooter, Cliff Moller of Briley Manufacturing, Kent Heitz of HI-VIZ Sight Systems, Gary Phipps of GRACO Corporation, Rick Ranzinger of Pachmayr, and Ken Kelly of Mag-Na-Port International.

For the past 149 years, SKB has produced high quality firearms in Japan with a tradition of handmade craftsmanship. Over the past 36 years, SKB has provided the American target shooter and hunter with a variety of shotgun models, all produced in that same tradition. Many of these shotguns have been passed from generation to generation and remain in service today. As we approach our 150th Anniversary, the staffs of the New SKB Arms factory and G.U. Inc., the U.S. importer, have reaffirmed our commitment to excellence in the traditions of handmade craftsmanship. We will continue to provide our customers with technically innovative products at affordable prices while offering the very best in personal customer service.

# RECEIVER

The 85TSS receiver is produced in two sizes; a standard frame for twelve gauge models, and smaller frame for all 20, 28, and 410 gauge models. The receiver is cut from a forged steel ingot by computerized CNC machines to precise dimensions measured in thousandths of an inch. The final result is a low profile box lock receiver with a modified "Greener" style crossbolt locking mechanism inletted at the top of the receiver. The strength of this design ensures that your SKB is capable of providing a lifetime of shooting enjoyment. The receiver is hand polished and enhanced with a rolled arabesque engraving pattern. It is then protected by a silver nitride finish applied in super heated conditions that provides a corrosion resistant surface.




# MONOBLOC

The monobloc is also cut from a forged steel ingot by computerized CNC machines to similar precise dimensions. The monobloc contains 2 locking lugs which engage the crossbolt, 2 integral shoulder lugs and a base lug which interlocks with the receiver as the action is closed. This combination forms one of the strongest actions on the market. The barrel tubes are seated and soldered into the monobloc to ensure the correct point of impact of both the top and bottom barrel. Each side of the monobloc is precisely cut for a single piece ejector and the pivot seat. The finished barrel group rotates at the pivot seat on two trunnions mounted through the sides of the receiver. After years of use, the SKB action can be easily re-tightened if need be, ensuring that your shotgun maintains a tight fit for many more years of service.



# TRIGGER GROUP

The non-detachable trigger system of the 85TSS has been improved with a design refinement to reduce engagement creep and over-travel. This new tournament trigger allows the sear to disengage and drop with less pull weight. The shooter feels a smooth and crisp trigger pull. The hammers are powered by "modified V" shaped springs that provide faster lock times than conventional coil springs. The firing order of the barrels is determined by the position of the barrel selector. The selector is located in the trigger blade, keeping its operation separate from the tang mounted manual safety.



# ACTION

- Low Profile, Box Lock Receiver
- Modified Greener Style Locking Bolt
- Inertia Trigger (12 & 20ga)
- Mechanical Trigger (28 & 410ga)
- "V" Shaped Main Springs
- Single Selective Trigger
- Manual Safety
- Rolled Engraving Pattern
- Silver Nitride Finish

# BARREL GROUP

85TSS SPECIFICATIONS

- 3" Chambers (except 28 ga)
- Chrome Lined Barrels and Chambers
- Backbored 12ga Barrels
- Lengthened Forcing Cones
- Competition Series Choke Tube System on 12ga Models
- Standard Series Choke Tube System on 20ga, 28ga and 410ga Models
- Automatic Ejectors
- Ventilated Top Rib
- Ventilated Side Ribs
- Hi-Viz Competition Sights
- Nickel Center Post
- Optional Pigeon Porting

## STOCK & FOREND

- Selected American Walnut
- 17 Line/Inch Cut Checkering
- Matte Polyurethane Finish
- Pachmayr Recoil Pads SC100 (Sporting/Skeet)
- Classic Trap (Trap Models)
  Schnabel Forend
- (Sporting Clay Models)
- Full Finger Groove Forend (Trap and Skeet Models)
- Optional Adjustable Comb Stocks

# **COMPETITIVE BARREL GROUP**

There have been many changes in shotshell components in recent years. The most significant change, as it pertains to modern barrel design, was the transition from a paper wad component to the plastic shot cup. The plastic shot cup's buffering cushions and petal sidewalls allowed barrels to be designed with "lengthened forcing cones" and "oversized

bores". These features produce denser and more evenly distributed patterns, while reducing felt recoil and shooter fatigue. SKB introduced both of these performance features in 1992 with the 85 series backbored barrel design. Since that time, SKB target guns have gained a reputation of being some of the hardest hitting barrels on the tournament circuit.

The SKB 12 gauge .735 backbored barrels are produced using a hammer forging process which ensures trueness over the length of the barrel and consistent wall diameter. Fabricated from a high strength chromium alloy steel, SKB barrels are highly polished to a near mirror surface. They are then chrome lined from the chamber to the muzzle. This protective surface reduces the corrosive effects of moisture produced by plastic shotshells and other environmental conditions. This process ensures that your SKB barrels will provide years of service.

All 85TSS barrel groups are fitted with an inter-choke tube system. Choke tube barrels are a standard feature in all gauges; 12, 20, 28, and 410. Briley Manufacturing, recognized world wide for its innovative leadership in choke tube and barrel technology, provides SKB with an array of stainless steel choke tubes. These choke tubes have been certified by Briley for use with steel shot.

A further refinement to the 85TSS series barrel group was accomplished by adding the performance enhancing feature of a competition sight system. This system utilizes a nickel mid bead and an interchangeable "Litepipe" front sight by HI-VIZ. This "Litepipe" system allows the shooter to be cognizant of the muzzle position while remaining focused on the flight of the target. The 85TSS sighting plane ensures fast target acquisition and proper barrel alignment.

		LITE	PIPE A	SSORI	MENT	S		
COLOR	GR	EEN	R	ED	OR#	NGE	WHITI	E BEAD
APERTURE SIZE	0.090	0.105	0.090	0,105	0.090	0.105	0.090	0.105
OVER/UNDER'S	11	1	1	1	1	. 1	1	1
2 BBL SETS	2	2	2	2				1
3 BBL SETS	3		3		3			1

Another refinement of the 85TSS competition barrel group includes incorporating a ventilated top rib and ventilated side ribs. These features allow the barrel to cool faster and reduce heat wave distortion along the sighting plane.

The performance of the 85TSS barrel group can be further enhanced by Mag-Na-Port International's patented "pigeon porting". This optional feature reduces the perceived recoil by 15 to 20%, and muzzle lift by 60 to 80% in 12 ga models.




The 85TSS barrel group has been fitted with a nickel center post and the HI-VIZ CompSight system. This sight allows the shooter to select the specific size and color Litepipe to meet the individual's ocular variation and lighting conditions of the event. The Litepipe is an optical-quality plastic, injection molded to precise dimension and color. A specific Litepipe kit has been selected to match the barrel configuration of each 85TSS model.




The 85TSS barrel group (12 ga ) is available with "Pigeon Porting" by Mag-Na-Port International. This porting process is accomplished by Electrical Discharge Machining (EDM), ensuring smooth incisions of exact dimensions. The "Pigeon porting pattern" reduces perceived recoil by 15 to 20%, and muzzle lift by 60 to 80% in 12 gauge models.

# **TOURNAMENT STOCKS**

The 85TSS Tournament stocks are designed to provide the shooter with a quick handling, responsive fit. A shotgun's "fit" is determined by the physical dimensions of the buttstock relative to the shooter's physique. These dimensions determine how fast the shooter can mount and accurately point the shotgun at a moving target. Stock dimensions affect how the



CTS hardware consists of 6061-T6 aluminum base plates and comb bushings, hardened A-2 tool steel support posts and stainless steel fasteners. The base plates are etched with 1/16" indicating lines for offset (left & right) adjustment of the comb. The comb height is adjusted by sliding 1/16" vinyl washers over the support post. The comb has a maximum adjustment range of 1/2" laterally and 1/2" vertically.



The stocks length of pull (LOP) gives consideration to the general size of the shooter, and the forward or rearward placement of the shooter's cheek on the comb of the stock.

The drop at comb (DAC) and heel (DAH) is the distance measured from an imaginary horizontal line extending back from the sighting plane of the shotaun. When the shooters cheek is resting on the comb. these dimensions affect the alignment of the shooter's eye either above or below the horizontal line of the sighting plane.

The thickness of the comb, and the cast of the stock's comb determine the left or right positioning of the shooter's eye relative to the centerline of the sighting plane. The "Cast at the Toe" shifts the butt pad position to conform with the muscular structure of the chest and shoulder. The radius of the pistol grip, and the **length of trigger pull (LOTP)** determines the positioning of the shooter's hand, affecting both control and comfort. shotgun is positioned in the shooter's hands and shoulder pocket, against the shooter's cheek, and the alignment of the shooter's eye to the sighting plane. Recognizing that each shotgun discipline has different requirements, and recognizing the need to "fit" our customers, tournament stocks are available in four styles; Sporting Clays, Skeet, Trap Standard, and Trap Monte Carlo. All are available with either fixed or adjustable comb.

All 85TSS tournament stocks feature a forward sweeping pistol grip with a tight radius curve. This places the shooter's hand closer to the trigger and aligns the wrist in a more natural and comfortable position. This enhances the shooter's ability to swing and control the shotgun.

The Sporting Clays, Trap Standard, and Trap Monte Carlo tournament stocks have been cut with a parallel comb that has a neutral cast at the heel. The advantages are two fold; the alignment of the shooter's eye to the sighting plane does not change along the entire length of the comb, and the recoil of the shotgun does not direct the stock up into the shooter's cheek. The fixed comb Skeet configuration retains the more traditional dimensions of a sloping comb stock.


The tournament style stocks with adjustable combs have been fitted with the GRACO "CTS" system. This system allows the shooter to adjust the comb for both height and offset. Base plates fitted in the comb are etched with 1/16'' indicating lines for offset adjustment. The comb height is adjusted by sliding 1/16" vinyl washers over the support posts. This system assures the shooter that the adjustment will not change during shooting, but has the advantage of an easily repeatable adjustment if a change to the comb becomes necessary. The comb has a maximum adjustment range of 1/2" laterally and 1/2" vertically.

The tournament stocks are fit with Pachmayr recoil pads. They are constructed of a "super soft" rubber blend that provides maximum recoil reduction. The Sporting Clays and Skeet models are fit with a Decelerator SC100 pad designed for fast mounting and recoil reduction. Trap models are fit with the Classic Trap pad. Its' concave face and double "X" construction provides a comfortable pad with no slip positioning.

The tournament stocks and forends are carved from select American Black Walnut by computerized CNC machines to precise standards. They are then tastefully detailed with 17 line diamond cut checkering ensuring a positive grip, and beautifully finished with a durable matte polyurethane finish.

The 85TSS tournament stock and forend balances the shotgun between the shooter's hands, allowing the gun to be mounted smoothly with a responsive feel. The stock's "fit" allows the shooter to point the shotgun accurately, and comfortably control the effects of recoil.

# 85TSS SPORTING CLAYS AND MULTI GAUGE SETS

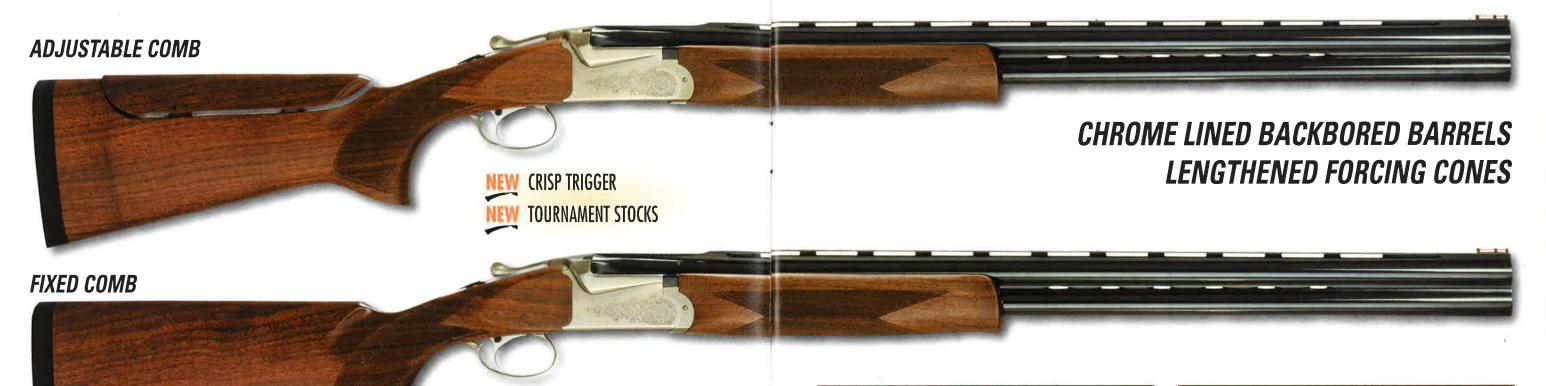



12 and 20 gauge Sporting Clays models, and the multi-gauge standard frame sets, are fitted with a 12 mm ventilated step rib. The rib has five center channel grooves bordered by two raised matted surfaces.

28 and 410 gauge Sporting Clays models, and the multi-gauge small frame sets, are fitted with a 8.5 mm ventilated step rib. The rib has three center channel grooves bordered by two raised matted surfaces.

Mastering this sport requires a shotgun that provides; a responsive fit, is well balanced between the shooter's hands, has a smooth swing, a fast sighting plane and a crisp trigger. The shotgun must also incorporate the performance features which allow fast target acquisition, and hard hitting patterns without producing shooter fatigue. That's what the 85TSS delivers! The rest is up to you!

**PIGEON PORTING** 

**AVAILABLE ON** 12 GA. MODELS

The performance tuned 85TSS Sporting Clays over & unders are available in 18 models and the Sporting Clays multi-gauge sets are available in 8 models. The specifications for each model are shown in the adjacent charts.

The 3-barrel multi-gauge set delivers consistency in weight, balance and feel. The 20, 28, and 410 gauge barrels are fitted with individual forends. An airline approved fitted aluminum case is included with the 3-barrel Sporting Clay set to protect your investment.

	SPECIFICATIONS
CHAMBERS	12, 20 & 410 GA 3" 28 GA 2 3/4"
TRIGGER	12 AND 20 GA – INERTIA 28 AND 410 GA – MECHANICAL
SAFETY	MANUAL
BARRELS	BACKBORED (12 GA.), LENGTHENED FORCING CONES, CHROME LINED
EJECTOR	AUTOMATIC
WEIGHTS*	FIXED COMB — SEE CHART FOR APPROXIMATE VALUE ADJUSTABLE COMB — ADD 1 1/4 OZ.
BARREL SELECTOR	DETERMINES WHICH BARREL IS FIRED FIRST LOCATED ON THE TRIGGER
SIGHTS	NICKEL CENTER BEAD WITH HI-VIZ COMPETITION SIGHT
CHOKE TUBES	BRILEY-SEE CHART ON PAGE 21
FOREND	SCHNABEL

STOCK SP	ECIFICATI	ONS S	PORTIN	G CLAYS	
	LOP	LOTP	DAC	DAH	DAM
FIXED COMB	14 1/2"	3 5/8"	1 5/8"	1 5/8"	**
ADJUSTABLE COMB	14 1/2"	3 5/8"	1 7/8"	1 7/8"	*
BUTT PAD	PACHMAYR	SC 100	SIZE: 0.8 I	INCH	

Length of pull (LOP), length of trigger pull (LOTP), drop at comb (DAC), drop at heel (DAH), drop at Monte Carlo (DAM)

		SPOR	RTING CLAYS	
GA	BBL Length	WEIGHT*	MANF. ID # FIXED COMB	MANF. ID # ADJ. COMB
12	32"	8 lb. 9 oz.	85T22FCSP*	85T22ACSP*
12	30"	8 lb. 7 oz.	85T20FCSP*	85T20ACSP*
12	28"	8 lb. 5 oz.	85T28FCSP	85T28ACSP
20	30"	7 lb. 10 oz.	85T00FCSP	85T00ACSP
20	28"	7 lb. 8 oz.	85T08FCSP	85T08ACSP
28	30"	7 lb. 8 oz.	85T80FCSP	85T80ACSP
28	28"	7 lb. 7 oz.	85T88FCSP	85T88ACSP
410	30"	7 lb. 10 oz.	85T40FCSP	85T40ACSP
410	28"	7 lb. 9 oz.	85T48FCSP	85T48ACSP
		MULT	-GAUGE SETS	
12	30"	8 lb. 7 oz.	057000/005000	0FT20C/00A CCD
20	30"	8 lb. 9 oz.	85T20C/00FCSP	85T20C/00ACSP
12	30"	8 lb. 7 oz.	85T20C/08FCSP	85T20C/08ACSP
20	28"	8 lb. 8 oz.	001200/001001	001200/00/1001
20	30"	7 lb. 8 oz.	85T00C/80FCSP	85T00C/80ACSP
28	30"	7 lb. 8 oz.	031000/001635	03100G/00AG3F
20	30"	7 lb. 8 oz.	10	
28	30"	7 lb. 10 oz.	85T084FCSP*	85T084ACSP*
410	30"	7 lb. 12 oz.		

Information and specifications are presented for reference only and are subject to change without notice. Weights will vary due to wood density.

\*Limited quantities available with high grade wood. Weights will be greater due to the density of fancy

# 85TSS ) TRAP, UNSINGLE AND TRAP COMBO'S



# CHROME LINED BACKBORED BARRELS LENGTHENED FORCING CONES

AVAILABLE IN TRAP UNSINGLE OR TRAP UNSINGLE COMBO



# STANDARD STOCK



PIGEON PORTING **AVAILABLE ON** 

TRAP MODELS

ADJUSTABLE RIB UNSINGLE BARREL

All Trap barrels are fitted with a 12 mm ventilated step rib. The surface of the rib has five center channel grooves bordered by two raised matte surfaces. (See photo on page 5)

The Unsingle barrel is equipped with an aluminum adjustable rib. The point of impact can be adjusted from 50 / 50 to 90 / 10 by rotating a small knurled wheel located in the muzzle support block.

The performance tuned 85TSS Trap over & under, Trap Unsingle, and Unsingle Trap Combo is available in a total of 24 variations. The specifications for each model are shown in the adjacent charts.

The new 85TSS Unsingle barrel is equipped with an adjustable rib that allows you to change the point of impact to match your style of shooting. The rib can be adjusted without special tools. Simply loosen one slotted screw with the choke tube wrench, then rotate the small knurled wheel in the muzzle support block to move the point of impact either up or down. Then retighten the slotted screw.

From the factory, the Unsingle is set to shoot approximately 65/35 or approximately 4" above the point of aim. The point of impact can be adjusted from 50/50 to 90/10 by simply rotating the wheel to change the angle of the rib.

	SPECIFICATIONS
CHAMBER/TRIGGER	12 GA – 3" / INERTIA, MANUAL SAFETY
BARRELS	BACKBORED (12 GA.), LENGTHENED FORCING CONES, CHROME LINED, CHOKE TUBES: PAGE 21
WEIGHTS*	FIXED COMB – SEE CHART FOR APPROXIMATE VALUE ADJUSTABLE COMB – ADD 1 1/4 OZ.
ADJUSTABLE RIB	ALUMINUM, STEP RIB, 12 mm. CENTER CHANNEL POINT OF IMPACT RANGE 50/50 to 90/10

STOCK SP	ECIFICATI	ONS T	RAP S	TANDARD	
	LOP	LOTP	DAC	DAH	DAM
FIXED COMB	14 3/8"	3 5/8"	1 1/2"	1 1/2"	433
ADJUSTABLE COMB	14 3/8"	3 5/8"	1 5/8"	1 5/8"	<u> 20</u>
STOCK SPE	CIFICATIO	NS TR	AP MO	NTE CARLO	
	LOP	LOTP	DAC	DAM	DAH
FIXED COMB	14 3/8"	3 5/8"	1 1/2"	1 1/2"	2"
ADJUSTABLE COMB	14 3/8"	3 5/8"	1 5/8"	1 5/8"	2"
BUTT PAD	PACHMAYR	CLASSI	C TRAP	SIZE: 1.0 INCH	

Length of pull (LOP), length of trigger pull (LOTP), drop at comb (DAC), drop at heel (DAH), drop at Monte Carlo (DAM)

NOTE: The approximate weight of the shotgun with Unsingle barrel attached is an additional 2 oz. to the overall weight shown above.

		TR	AP OVER	JUNDERS	
BBL 0/U	BBL UN-SNL	STOCK Type	0/U WEIGHT	MANF. ID # FIXED COMB	MANF. ID # ADJ. COMB
32		MC	8 lb. 12 oz.	85T22FCTM	85T22ACTM
32		STD		85T22FCTN	85T22ACTN
30		MC	8 lb. 10 oz.	85T20FCTM	85T20ACTM
30		STD		85T20FCTN	85T20ACTN
		1	TRAP UN	SINGLE	
	32	MC	8 lb. 12 oz.	85T22FCTMUA	85T22ACTMUA
	32	STD	8 lb. 12 oz.		85T22ACTNUA
	34	MC	8 lb. 14 oz.	85T24FCTMUA*	85T24ACTMUA*
	34	STD	8 lb. 14 oz.		85T24ACTNUA*
8-10-112-01		UNSI	NGLE TR	AP COMBOS	
32	34	MC	8 lb. 12 oz.	85T22FCTM/24UA	85T22ACTM/24UA*
32	34	STD	8 lb. 12 oz.	85T22FCTN/24UA	85T22ACTN/24UA
30	34	MC	8 lb. 10 oz.	85T20FCTM/24UA	85T20ACTM/24UA*
30	34	STD	8 lb. 10 oz.	85T20FCTN/24UA	85T20ACTN/24UA
30	32	MC	8 lb. 10 oz.	85T20FCTM/22UA	85T20ACTM/22UA*
30	32	STD	8 lb. 10 oz.	85T20FCTN/22UA	85T20ACTN/22UA

Information and specifications are presented for reference only and are subject to change without notice. Weights will vary due to wood density.

\*Limited quantities available with high grade wood. Weights will be greater due to the density of





12 gauge Skeet models are fitted with a 9.5 mm ventilated sloped rib. The rib has three center channel grooves bordered by two raised matted

All small gauge Skeet models, and the multi-gauge sets, are fitted with a 8.5 mm ventilated sloped rib. The rib has three center channel grooves bordered by two raised matted surfaces.



Multi-gauge Skeet Sets and Sporting Clay Sets are available with either fixed or adjustable comb stocks.

The performance tuned 85TSS Skeet over & under is available in 18 models and the Skeet multi-gauge set is available in 2 models. The specifications for each model are shown in the adjacent charts.

12 GA. MODELS

The 85TSS Skeet models feature our new semi-wide "sloped" target rib. This new rib has three center channel grooves with matte finished outer edges fitted with a nickel center post and the HI-VIZ Litepipe competition sight. This new sighting plane ensures fast target acquisition and proper alignment, which gives the competitor an instinctive advantage.

The 3-barrel multi-gauge set delivers consistency in weight, balance and feel. The 20, 28, and 410 gauge barrels are fitted with individual forends. An airline approved fitted aluminum case is included with the 3-barrel Skeet set to protect your investment.

# CHROME LINED BACKBORED BARRELS & LENGTHENED FORCING CONES

	SPECIFICATIONS
CHAMBERS	12, 20 & 410 GA - 3" 28 GA - 2 3/4"
TRIGGER	12 AND 20 GA – INERTIA 28 AND 410 GA – MECHANICAL
SAFETY	MANUAL
BARRELS	BACKBORED (12 GA.), LENGTHENED FORCING CONES CHROME LINED
EJECTOR	AUTOMATIC
WEIGHTS*	FIXED COMB – SEE CHART FOR APPROXIMATE VALUI ADJUSTABLE COMB – ADD 1 1/4 0Z.
BARREL SELECTOR	DETERMINES WHICH BARREL IS FIRED FIRST LOCATED ON THE TRIGGER
SIGHTS	NICKEL CENTER BEAD WITH HI-VIZ COMPETITION SIGHT
CHOKE TUBES	BRILEY-SEE CHART ON PAGE 21
FOREND	FINGER GROOVE

STO	CK SPECIF	ICATIO	ONS SKE	EΤ	
	LOP	LOTP	DAC	DAH	DAM
FIXED COMB	14 3/8"	3 5/8"	1 1/2"	2 3/16"	<del></del> ):
ADJUSTABLE COMB	14 3/8"	3 5/8"	1 7/8"	1 7/8"	#0
BUTT PAD	PACHMAYR	SC 100	SIZE: 0.8	NCH	

Length of pull (LOP), length of trigger pull (LOTP), drop at comb (DAC), drop at heel (DAH), drop at Monte Carlo (DAM)

			SKEET	
GA	BBL LENGTH	WEIGHT*	MANF. ID # FIXED COMB	MANF. ID # ADJ. COMB
12	32"	8 lb. 6 oz.	85T22FCV*	85T22ACV*
12	30"	8 lb. 4 oz.	85T20FCV*	85T20ACV*
12	28"	8 lb. 2 oz.	85T28FCV	85T28ACV
20	30"	7 lb. 7 oz.	85T00FCV	85T00ACV
20	28"	7 lb. 6 oz.	85T08FCV	85T08ACV
28	30"	7 lb. 10 oz.	85T80FCV	85T80ACV
28	28"	7 lb. 9 oz.	85T88FCV	85T88ACV
410	30"	7 lb. 12 oz.	85T40FCV	85T40ACV
410	28"	7 lb. 11 oz.	85T48FCV	85T48ACV
		MULT	-GAUGE SETS	
20	28"	7 lb. 7 oz.		
28	28"	7 lb. 9 oz.	85T084FCV	85T084ACV*
410	28"	7 lb. 11 oz.		

Information and specifications are presented for reference only and are subject to change without notice. Weights will vary due to wood density.

\*Limited quantities available with high grade wood. Weights will be greater due to the density of











# FIELD MODELS - SILVER - SILVER/GOLD - BLUE/GOLD



Features: Gold plated trigger, 2 gold plated game scenes and a hand finished schnabel forend.

# NOW AVAILABLE IN MATTE OR HIGH GLOSS STOCK FINISHES!

# 585 SPECIFICATIONS

# STOCK & FOREND

- Select American Walnut • 17Line/Inch Cut Checkering
- Fitted Grip Cap
- Fitted Butt Pad (12ga)
- Fitted Butt Plate (small gauge Field Models)

## **ACTION**

- Single Selective Trigger
- Manual Safety
- Rolled Engraving Pattern Silver Nitride Finish
- Inertia Triggers (12 & 20ga)
- Mechanical Trigger (28 & 410ga)
- Low Profile Receiver with Box Lock (Greener Style Cross Bolt)

## **BARREL GROUP**

- Automatic Ejectors
- Ventilated Top Rib
- Full Side Ribs
- Back Bored Barrels (12ga Only)
- Lengthened Forcing Cones
- Competition Series Choke Tube System on 12ga Models
- Standard Series Choke Tube System on 20ga, 28ga and

12 GA OVERSIZED DIAMETER BORES • LENGTHENED FORCING CONES • COMPETITION SERIES CHOKE TUBES





# NEW! MATTE FINISH STOCK & FORENDS NOW AVAILABLE

## STOCK & FOREND

- Select American Walnut
- 17Line/Inch Cut Checkering
- Fitted Grip Cap
- Fitted Butt Pad (12aa)
- Fitted Butt Plate (20ga)

# **ACTION**

- Single Selective Trigger
- Manual Safety

Inertia Triggers

- Rolled Engraving Pattern
- Deep Luster Blueing


505 SPECIFICATIONS

 Low Profile Receiver with Box Lock (Greener Style Cross Bolt)

# **BARREL GROUP**

- Automatic Ejectors

- Ventilated Top Rib
- Full Side Ribs
- Standard Diameter Bore Lengthened Forcing Cones
- Inter-Choke System on
- 12ga and 20ga Models

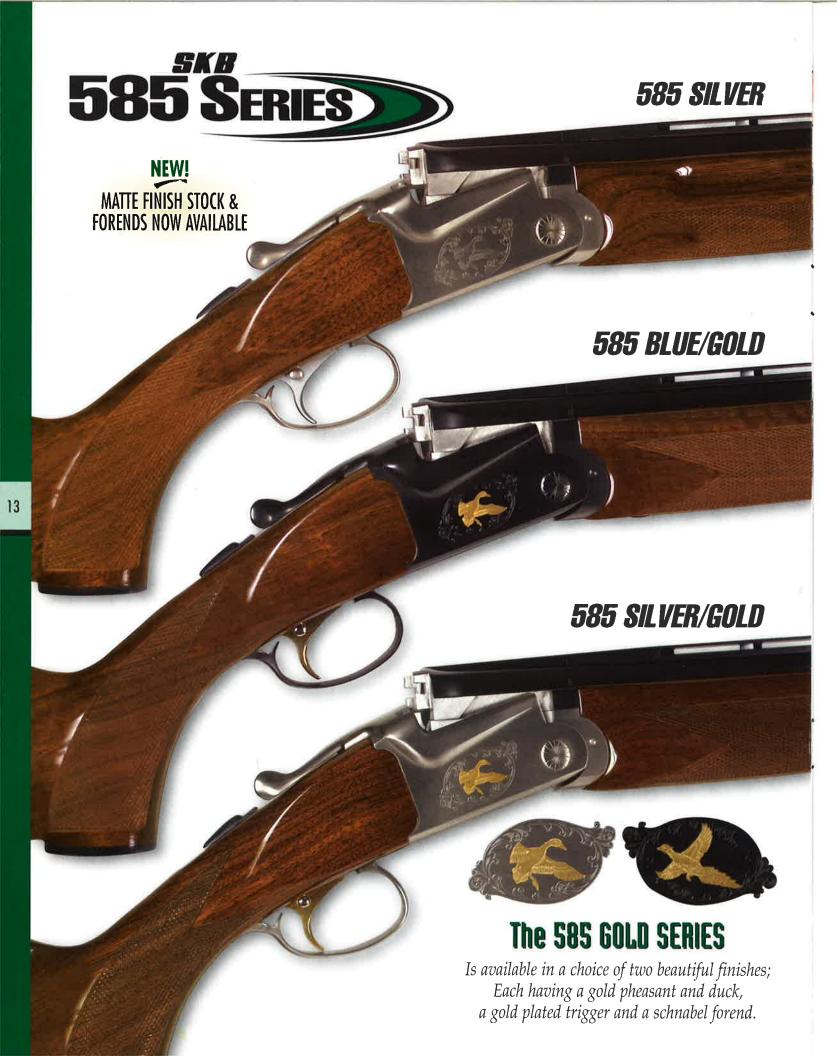

# RECEIVER

The 585 and 505 receivers are produced in two sizes, a standard frame for twelve gauge models, and smaller frame for all 20, 28, and 410 gauge models. The receiver is cut from a forged steel ingot by computerized CNC machines to precise dimensions measured in thousandths of an inch. The final result is a low profile box lock receiver with a modified "Greener" style crossbolt locking mechanism inletted at the top of the receiver. The strength of this design ensures that your SKB is capable of providing a lifetime of shooting enjoyment. The receiver is hand polished and enhanced with a rolled game scene engraving pattern. It is then protected by a silver nitride finish applied in super heated conditions or a traditional blued finish. Both provide a corrosion resistant surface.

# MONOBLOCK

The monobloc is also cut from a forged steel ingot by computerized CNC machines to similar precise dimensions. The monobloc contains 2 locking lugs which engage the crossbolt, 2 integral shoulder lugs and a base lug which interlock with the receiver as the action is closed. This combination forms one of the strongest actions on the market. The barrel tubes are seated and soldered into the monobloc to insure the correct point of impact of both the top and bottom barrel. Each side of the monobloc is precisely cut for a single piece ejector and the pivot seat. The finished barrel group rotates at the pivot seat on two trunnions mounted through the sides of the receiver. After years of use, the SKB action can be easily re-tightened if need be, ensuring that your shotgun maintains a tight fit for many more years of service.

# TRIGGER GROUP

The 585 Series is equipped with a non-detachable trigger system. The 12 and 20 gauge models are an interia system; while the 28 and 410 gauge models are mechanical. The hammers are powered by "V" shaped springs that provide faster lock times than conventional coil springs. The firing order of the barrels is determined by the position of the barrel selector. The selector is located in the trigger blade, keeping its operation separate from the tang mounted manual safety.

# BARREL GROUP

All SKB barrels are hammer forged from a high strength chromium alloy steel, and finished to a near mirror surface. Lengthened forcing cones and choke tube barrels are a standard features in all gauges; 12, 20, 28, and 410. The 585 Series 12 gauge field models feature the competition barrel group, .735 backbored barrels, lengthened forcing cones and the competition series choke system.

	585 SPECIFICATIONS
CHAMBERS	12, 20 & 410 GA - 3" 28 GA - 2 3/4"
TRIGGER	12 AND 20 GA – INERTIA 28 AND 410 GA – MECHANICAL
SAFETY	MANUAL
BARRELS	- CHROME MOLY STEEL - BACK BORED 12 GAUGE - LENGTHENED FORCING CONES - ALL GAUGES
RIB WIDTH	9.5 MM – 12 GA. MODELS 8.5 MM – 20, 28 AND 410 MODELS
EJECTOR	AUTOMATIC
WEIGHTS*	SEE CHART FOR APPROXIMATE VALUE
BARREL SELECTOR	DETERMINES WHICH BARREL IS FIRED FIRST LOCATED ON THE TRIGGER
SIGHTS	METAL FRONT BEAD
CHOKE TUBES	BRILEY-SEE CHART ON PAGE 21
FOREND	SCHNABEL – GOLD SERIES FINGER GROOVE – STANDARD SERIES
BUTT PAD	12 GA – PACHMAYR F325 SIZE: 1"
BUTT PLATE	20, 28 & 410 GA MODELS

585 STOCK SPECIFICATIONS									
	LOP	LOTP	DAC	DAH	DAM				
IELD	14 1/8"	4 1/8"	1 1/2"	2 3/16"	<u>-</u>				
PLAND	14 1/8"	3	1 1/2"	2 3/16"	=				
OUTH	13 1/2"	4 1/8"	1 1/2"	2 1/4"	=				

Length of pull (LOP), length of trigger pull (LOTP), drop at comb (DAC), drop at heel (DAH), drop at Monte Carlo (DAM)

# STOCK and FOREND

All 585 and 505 series are fitted with standard grade American Black Walnut stocks & forends. The stocks and forends are inletted by CNC machines to precise standards. The pistol grip stocks are fitted with a black grip cap and all field models are available in either a high gloss or matte finished polyurethane for richness and lasting durability, then tastefully detailed with 17 line diamond point checking. The 12 gauge models are fitted with a 1 inch Pachmayr Deluxe Field pad. The small gauge models are fitted with a curved plastic butt plate.

All the 585 "Gold series" models and all Upland models are fitted with a schnabel shaped forend. The 505 and 585 standard series are fitted with a finger groove style forend.







The Field Model is designed to provide the hunter with a well balanced, fast shouldering shotgun. The guns are dimensioned for consistent point and swing control, and are available in 12, 20, 28, & 410 gauge. Our standard features include: a finely engraved low profile receiver, Greener cross-bolt, box lock action, manual safety conveniently located on the top tang, single selective trigger, and automatic ejectors. Each shotgun is fitted with a sculpted pistol grip stock & forend, finished to a high gloss for richness and lasting durability.

# AVAILABLE IN MATTE OR HIGH GLOSS STOCK FINISHES!

	585 FIELD MODELS							
GA	GA LENGTH WEIGHT*		MANF. ID # SILVER	MANF. ID # SILVER/GOLD	MANF. ID # BLUE/GOLD			
12	28"	7 lb. 12 oz.	A5828CF	G5828CF	B5828CF			
12	26"	7 lb. 11 oz.	A5826CF	G5826CF	B5826CF			
20	28"	6 lb. 12 oz.	A5808CF	G5808CF	B5808CF			
20	26"	6 lb. 10 oz.	A5806CF	G5806CF	B5806CF			
28	28"	6 lb. 14 oz.	A5888CF	G5888CF	B5888CF			
28	26"	6 lb. 13 oz.	A5886CF	G5886CF	B5886CF			
410	28"	7 lb. 0 oz.	A5848CF	G5848CF	B5848CF			
410	26"	6 lb. 14 oz.	A5846CF	G5846CF	B5846CF			

Information and specifications are presented for reference only and are subject to change without notice. Weights will vary due to wood density.



**12 & 20 GAUGE SETS** 

20 & 28 **GAUGE SETS** 

28 & 410



585 SILVER 12 GA. & 20 GA. SET SHOWN

The 2 Barrel Field Set provides the hunter with a choice of gauges to use. This versatility allows one to assess the hunting conditions or the type of game being hunted then choose the most appropriate gauge. This is done without sacrificing the "fit & feel" of the shotgun. Most hunters agree that their favorite shotgun "just fits them well". The SKB Field Set gives you that same confidence but with the added advantage of choosing a smaller gauge.

# AVAILABLE IN MATTE OR HIGH GLOSS STOCK FINISHES!

	585 MULTI-GAUGE FIELD SETS							
GA	BBL LENGTH	WEIGHT*	MANF. ID # SILVER	MANF. ID # SILVER/GOLD	MANF. ID # Blue/Gold			
12	28"	7 lb. 11 oz.	A5828C/ 5806CF	G5828C/	B5828C/			
20	26"	7 lb. 12 oz.		5806CF	5806CF			
20	28"	7 lb. 2 oz.	A5808C/	G5808C/ 5888CF	B5808C/ 5888CF			
28	28"	7 lb. 1 oz.	5888CF					
20	26"	7 lb. 1 oz.	A5806C/	G5806C/	B5806C/			
28	26"	7 lb. 0 oz.	5886CF	5886CF	5886CF			
28	28"	7 lb. 1 oz.	A5888C/ 5846CF	G5888C/	B5888C/			
410	26"	7 lb. 0 oz.		5846CF	5846CF			

Information and specifications are presented for reference only and are subject to change without notice. Weights will vary due to wood density.

# 585 SERIES YOUTH & LADIES



The new "Youth and Ladies" model 585 Field takes into consideration the shorter arm reach of these individuals by featuring a shorter 13 1/2 inch length of pull. This new stock dimension gives these shooters a natural quick pointing fit, which is well balanced for good swing control. The 12 gauge models incorporate all the '85 Series standard features: oversize bores, lengthened forcing cones and competition series choke tubes.

# AVAILABLE IN MATTE OR HIGH GLOSS STOCK FINISHES!

585 FIELD MODELS							
GA	BBL LENGTH WEIGHT* MANF. ID # SILVER			MANF. ID # SILVER/GOLD	MANF. ID # BLUE/GOLD		
12	28"	7 lb. 11 oz.	A5828CFY	G5828CFY	B5828CFY		
12	26"	7 lb. 9 oz.	A5826CFY	G5826CFY	B5826CFY		
20	26"	6 lb. 7 oz.	A5806CFY	G5806CFY	B5806CFY		

Information and specifications are presented for reference only and are subject to change without notice. Weights will vary due to wood density.



# AVAILABLE IN MATTE OR HIGH GLOSS STOCK FINISHES!

The 585 Upland features an English style straight grip stock 26" with wrap around checkering. A schnabel forend provides 20 26" the shooter with a distinct, responsive feel. The Upland is 26" available in three gauges: 12, 20, & 28 with 26" barrels.

585 UPLAND BBL LENGTH WEIGHT\* MANF. ID # MANF. ID # MANF. ID# SILVER SILVER/GOLD BLUE/GOLD 7 lb. 10 oz. A5826CFE G5826CFE B5826CFE A5806CFE 6 lb. 10 oz. G5806CFE B5806CFE 6 lb. 12 oz. A5886CFE G5886CFE B5886CFE

Information and specifications are presented for reference only and are subject to change without notice. Weights will vary due to wood density.


# FIELD MODELS



The 505 Field is designed with an emphasis toward Quality and Affordability. These models are an extraordinary value, equipped with standard features which include a finely engraved receiver with a deep blue finish, a single selective trigger, automatic ejectors, manual safety, a finely checkered American Walnut stock and forend and the standard series choke tube system.

	505 FIELD						
GA	BBL LENGTH	WEIGHT*	MANF. ID #				
12	28"	7 lb. 12 oz.	N528CFP				
12	26"	7 lb. 11 oz.	N526CFP				
20	28"	6 lb. 12 oz.	N508CFP				
20	26"	6 lb. 10 oz.	N506CFP				

Information and specifications are presented for reference only and are subject to change without notice. Weights will vary due to wood density.

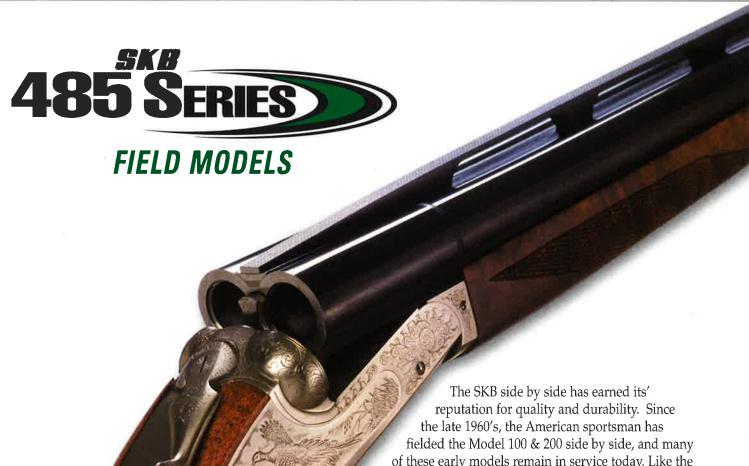

SKR

is derived from

the family name

SAKABA.

The company was formed

in the Ibaraki province,

Japan in 1855.

of these early models remain in service today. Like the early models, the 485 and 385 series are characterized as high quality shotguns that are "well balanced", "fast shouldering" and capable of handling todays premium lead and nontoxic ammunition.

The SKB side by side receiver is a traditional boxlock design with automatic ejectors. The barrel group is fabricated using a monobloc which features two locking lugs that engage a sliding underbolt. The hammer forged chrome-moly steel barrels have lengthened forcing cones and are fitted with the SKB inter-choke system. These performance features produce denser and more evenly distributed pellet patterns and reduce felt recoil.

The semi-fancy American Black walnut stock is offered in either a pistol grip or English straight grip and a choice of two finishes. The high gloss finish models are fitted with a semi-beavertail forend. The matte finish models are fitted with a traditional splinter forend. The splinter forend models weigh approximately 5 ounces less than the comparable semi-beavertail models. Both models are equipped with an Anson style push button forend release.

The 485 Series is available in 12, 20, or 28 ga. with 28" or 26" barrels. The silver nitrided receiver & side plates are beautifully engraved with scroll and Upland game scenes. The barrel group is fitted with a distinctive raised ventilated rib with a matte finish.


# AVAILABLE IN PISTOL GRIP OR ENGLISH STOCK



SIDE	BY SIDE SPECIFICATIONS			
CHAMBERS	12 & 20 GA – 3" 28 GA – 2 3/4"			
TRIGGER	INERTIA – ALL MODELS			
SAFETY	AUTOMATIC – ALL MODELS			
BARRELS CHROME MOLY STEEL LENGTHENED FORCING CONES – ALL GAL				
EJECTOR	AUTOMATIC			
BARREL SELECTOR	DETERMINES WHICH BARREL IS FIRED FIRST LOCATED ON THE TRIGGER			
CHOKE TUBES	BRILEY – SEE CHART ON PAGE 21			
SIGHTS	485 - NICKEL CENTER BEAD WITH WITH WHITE FRONT BEAD 385 FIELD - METAL FRONT BEAD 385 SPTG NICKEL CENTER BEAD WITH HI-VIZ COMPETITION SIGHT			

STOCK SPECIFICATIONS								
LOP LOTP DAC DAH								
485	14 1/8"	4 1/4"	1 1/2"	2 5/8"				
385 FIELD	14 1/8"	4 1/4"	1 1/2"	2 5/8"				
385 SPORTING	14 1/4" 4 1/4" 1 1/2" 1 7/8"							
BUTT PAD	PACHMAYR "OLD ENGLISH" SIZE: 0.6 INCH							

Length of pull (LOP), length of trigger pull (LOTP), drop at comb (DAC), drop at heel (DAH),

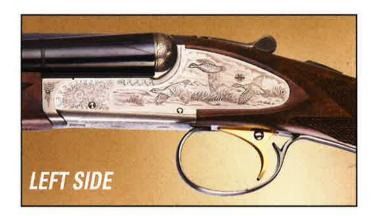

485 SERIES						
GA	BBL Length	STOCK	WEIGHT*	MANF. ID # BEAVERTAIL	MANF. ID # SPLINTER	
12	28"	PISTOL	7 lb. 6 oz.	A4828CFP		
12	28"	ENGLISH	7 lb. 5 oz.	A4828CFE		
12	26"	PISTOL	7 lb. 5 oz.	A4826CFP		
12	26"	ENGLISH	7 lb. 5 oz.	A4826CFE		
20	28"	PISTOL	6 lb. 13 oz.	A4808CFP	S4808AFP	
20	28"	ENGLISH	6 lb. 12 oz.	A4808CFE	S4808AFE	
20	26"	PISTOL	6 lb. 10 oz.	A4806CFP	S4806AFP	
20	26"	ENGLISH	6 lb. 9 oz.	A4806CFE	S4806AFE	
28	28"	PISTOL	6 lb. 15 oz.	A4888CFP	S4888AFP	
28	28"	ENGLISH	6 lb. 14 oz.	A4888CFE	S4888AFE	
28	26"	PISTOL	6 lb. 13 oz.	A4886CFP	S4886AFP	
28	26"	ENGLISH	6 lb. 12 oz.	A4886CFE	S4886AFE	

Information and specifications are presented for reference only and are subject to change without notice. Weights will vary due to wood density.

Weights shown are for Semi-Beavertail Forend models. Splinter Forend model will average 5 oz. less

# 385 SERIES

FIELD MODELS
FIELD SETS &
SPORTING CLAYS

The 385 Series is available in several configurations; the Field model, the multi-gauge Field Set, the Sporting Clay model and the multi-gauge Sporting Clay Set.

The 385 Field and Field Sets are fitted with a raised solid rib with a matte finished surface. The 385 Sporting Clays models are fitted with a raised ventilated rib. The 385 receiver is silver nitrided and beautifully engraved with scroll and game scenes.

The 385 Field model is available in 12, 20, or 28 ga. with 28" or 26" barrels.





HIGH-GLOSS FINISH

**MATTE FINISH** 

**NEW SPLINTER** 

# AVAILABLE IN PISTOL GRIP OR ENGLISH STOCK



	- "	FIELL	O MODEL	S	
GA	BBL LENGTH	STOCK	WEIGHT*	MANF. ID # BEAVERTAIL	MANF. ID # SPLINTER
12	28"	PISTOL	7 lb. 3 oz.	A3828CFP	
12	28"	ENGLISH	7 lb. 1 oz.	A3828CFE	
12	26"	PISTOL	7 lb. 1 oz.	A3826CFP	
12	26"	ENGLISH	7 lb. 0 oz.	A3826CFE	
20	28"	PISTOL	6 lb. 11 oz.	A3808CFP	S3808AFP
20	28"	ENGLISH	6 lb. 11 oz.	A3808CFE	S3808AFE
20	26"	PISTOL	6 lb. 10 oz.	A3806CFP	S3806AFP
20	26"	ENGLISH	6 lb. 10 oz.	A3806CFE	S3806AFE
28	28"	PISTOL	7 lb. 0 oz.	A3888CFP	S3888AFP
28	28"	ENGLISH	7 lb. 0 oz.	A3888CFE	S3888AFE
28	26"	PISTOL	6 lb. 13 oz.	A3886CFP	S3886AFP
28	26"	ENGLISH	6 lb. 13 oz.	A3886CFE	S3886AFE
	N	IULTI-GA	UGE FIEL	D SETS	
20	28"	PISTOL	6 lb. 11 oz.	A3808/	S3808/
28	28"	PISTUL	6 10. 11 02.	3888CFP	3888AFP
20	28"	ENGLISH	6 lb. 11 oz.	A3808/	S3808/
28	28"	LINGLISH	0 ID. 11 UZ.	3888CFE	3888AFE
20	26"	PISTOL	6 lb. 10 oz.	A3806/	S3806/
28	26	TISTUL	0 10. 10 02.	3886CFP	3886AFP
20	26"	ENGLISH	6 lb. 10 oz.	A3806/	S3806/
28	26	LNULISH	0 ID. 10 UZ.	3886CFE	3886AFE

Information and specifications are presented for reference only and are subject to change without notice. Weights will vary due to wood density.

Weights shown are for Semi-Beavertail Forend models. Splinter Forend model will average 5 oz. less than weight shown above.

SPORTING CLAY MODELS						
GA	BBL LENGTH	STOCK	WEIGHT*	MANF. ID # GLOSSY	MANF. ID # MATTE	
12	28"	PISTOL	7 lb. 6 oz.	A3828CVSP		
20	30"	PISTOL	7 lb. 0 oz.		S3800CVSP	
20	28"	PISTOL	6 lb. 14 oz.	A3808CVSP		
28	30"	PISTOL	7 lb. 3 oz.		S3880CVSP	
28	28"	PISTOL	6 lb. 14 oz.	A3888CVSP		
	MULTI-	GAUGE .	SPORTIN	G CLAY SE		
20	30"	DIOTO	7.11. 0		S3800C/	
28	30"	PISTOL	7 lb. 0 oz.		3880SP	
20	28"	DICTOL	C lb 14 o-	A3808C/		
28	28"	PISTOL	6 lb.14 oz.	3888SP		

Information and specifications are presented for reference only and are subject to change without notice. Weights will vary due to wood density.

Weights shown are for Semi-Beavertail Forend models. Splinter Forend model will average 5 oz, less than weight shown above.



Raised Ventilated Rib with Semi-Beavertail Forend on Sporting Clay

21

## MODIFIED MODIFIED IMP. CYLINDER MODIFIED SKEET II IMP CYLINDER FATTA FULL EXTRA FULL SKEET MODELS COMMENTS X X 85TSS SPORTING (12 GA) X $X \mid X$ SPORTING (SMALL GA) SPORTING SET (12 & 20 GA) X X X X Х **3 CHOKES PER GAUGE** X **3 CHOKES PER GAUGE** SPORTING SET (20 & 28 GA) X χl X 3 CHOKES PER GAUGE **SPORTING SET (20,28,410 GA)** X XX 85TSS SKEET (12 GA) X XX SKEET (SMALL GA) SKEET SET (20,28,410 GA) X XX 3 CHOKES PER GAUGE $X \mid X$ 85TSS TRAP (0/U OR UNSINGLE) $\mathbf{x} \mid \mathbf{x} \mathbf{x}$ TRAP COMBO X FIELD/UPLAND/YOUTH (12 GA) FIELD - 28" (SMALL GA) X X X Χ 585 FIELD/UPLAND/YOUTH-26" (SM GA) X X **3 CHOKES PER GAUGE** FIELD SET - (12 & 20 GA) X FIELD SET - 28" (20 & 28 GA) X **3 CHOKES PER GAUGE** X X **3 CHOKES PER GAUGE** FIELD SET - 26" (20 & 28 GA) X X X 28 GAUGE FIELD SET - (28 & 410 GA) 410 GAUGE 505 FIELD (12 GA) X X X X X X FIELD 28" (20 GA) FIELD 26" (20 GA) X X SxS FIELD (12 GA) X X X SxS FIELD & FIELD SET-28" (SM GA) **3 CHOKES PER GAUGE** X SxS FIELD & FIELD SET-26" (SM GA) **3 CHOKES PER GAUGE** X SxS SPORTING CLAY (ALL GA) X X **SPORTING CLAY SET (SM GA)** X 3 CHOKES PER GAUGE X

# **EXTENDED AND INTER-CHOKE SYSTEMS**



# **EXTENDED CHOKE TUBES**



# 12 GAUGE - COMPETITION SERIES

MANUFACTURERS ID# KNURLED	RIM Notches	CONSTRICTION	PATTERN WITH LEAD SHOT	PATTERN WITH STEEL SHOT
SCST12TF	NONE	.035	TRAP FULL	**
SCST12XF	1	.030	EXTRA FULL	**
SCST12F	2	.025	FULL	**
SCST12IM	3	.020	IMP MOD	EXTRA FULL
SCST12M	4	.015	MOD	FULL
SCST12SKII	5	.010	SK II	IMP MOD
SCST12IC	6	.005	IC	MOD
SCST12SKI	7	+ .005	SKI	IMP CYL

NOTE: Competition Series For SKB Models: 585, 685, 785, 885 A, and 85TSS.

# 20 GAUGE - STANDARD SERIES

ı	SCST20XF	NONE	.040	EXTRA FULL	**
ı	SCST20F	1	.033	FULL	**
ı	SCST20IM	2	.026	IMP MOD	EXTRA FULL
ı	SCST20M	3	.019	MOD	FULL
ı	SCST20SKII	4	.012	SK II	IMP MOD
ı	SCST20IC	5	.005	IC	MOD
١	SCST20SKI	6	+ .004	SKI	IMP CYL

NOTE: Fits all 20 gauge models.

COMPETITION 12 GAUGE	MANF. ID#	RIM Notch	CONSTR.	PATTERN WITH STEEL SHOT
TRAP FULL	CSTS12TF	NONE	.035	**
EXTRA FULL	CSTS12XF	1	.030	**
FULL	CSTS12F	2	.025	**
IMP. MODIFIED	CSTS12IM	3	.020	XTRA FULL
MODIFIED	CSTS12M	4	.015	FULL
SKEET II	CSTS12SKII	5	.010	IMP MOD
IMP. CYLINDER	CSTS12IC	6	.005	MOD
SKEET I	CSTS12SKI	7	+.005	IMP CYL

NOTE: Competition Series for SKB Models 585, 685, 785, 885A and 85TSS.

\*Not recommended for use with steel shot.

STANDARD SERIES 12 GAUGE	MANF. ID#	RIM Notch	CONSTR.	PATTERN WITH STEEL SHOT
EXTRA FULL	CTS12XF	NONE	.038	**
FULL	CTS12F	1	.032	**
IMP. MODIFIED	CTS12IM	2	.023	FULL
MODIFIED	CTS12M	3	.014	IMP MOD
IMP. CYLINDER	CTS12IC	4	.005	MOD
SKEET	CTS12SK	5	+.004	IMP CYL

STANDARD SERIES 20 GAUGE	MANF. ID#	RIM NOTCH	CONSTR.	PATTERN WITH STEEL SHOT
FULL	CTS20F	1	.032	**
IMP. MODIFIED	CTS20IM	2	.023	FULL
MODIFIED	CTS20M	3	.014	IMP MOD
IMP. CYLINDER	CTS20IC	4	.005	MOD
SKEET I	CTS20SK	5	+.004	IMP CYL

STANDARD SERIES 28 GAUGE	MANF. ID#	RIM NOTCH	CONSTR.	PATTERN WITH STEEL SHOT
FULL	CTS28F	1	.025	**
IMP. MODIFIED	CTS28IM	2	.018	FULL
MODIFIED	CTS28M	3	.010	IMP MOD
IMP. CYLINDER	CTS28IC	4	.004	MOD
SKEET I	CTS28SK	5	+.004	IMP CYL

STANDARD SERIES 410 GAUGE	MANF. ID#	RIM NOTCH	CONSTR.	PATTERN WITH STEEL SHOT
FULL	CTS410F	1	.024	**
IMP. MODIFIED	N/A	2	X,	FULL
MODIFIED	CTS410M	3	.015	IMP MOD
IMP. CYLINDER	CTS410IC	4	.010	MOD
SKEET I	CTS410SK	5	.006	IMP CYL

NOTE: 12 Gauge Standard Series for SKB Models: 1300, 1900, 505, 605, 385, 485 and 885.

All 20 gauge, 28 gauge and 410 gauge models utilize Standard Series choke tubes.

\*\* Not recommended for use with steel shot.

Information and specifications are presented for reference only and are subject to change without notice